Reach-ins | REFRIGERATORS & FREEZERS

- ARR-23
- ARR-23-1G
- ARF-23
- ARR-49
- ARR-49-2G
- ARF-49
- ARR-72
- ARR-72-3G
- ARF-72

ARR-(F) 23

ARR-(F) 49

ARR-(F) 72

STANDARD FEATURES

⌘ DURABLE STAINLESS STEEL
Our reach-ins boast a sturdy stainless steel exterior and interior finish and galvanized back panel providing strength and durability.

⌘ ERGONOMICALLY DESIGNED DOORS WITH LOCKS
Standard solid and glass doors come with easy grip handles and self closing/90 ° stay open door feature, working together for customer convenience.

⌘ MAGNETIC DOOR GASKET
Built of one piece, the gasket is removable without tools for ease of cleaning and replacement. Door's in step design gives added protection to the gasket.

⌘ DIGITAL CONTROLLER
This temperature control system on refrigerators and freezers allows customers to keep the utmost food quality for a longer period of time.

⌘ HIGH DENSITY POLYURETHANE INSULATION
2-3/8" Ecomate® CFC-Free plyurethane insulation foamed in place including the mullion on double doors for extra strength and energy efficiency, while being environmentally friendly with zero ozone depletion potential (ODP) and zero global warming potential (GWP).

⌘ EFFICIENT REFRIGERATION SYSTEM
Factory engineered oversized and balanced refrigeration system. CFC-free R-134A Refrigerators mantain temperature from 33° to 38°F, 3 door refrigerator is R-404A.
R-404A Freezers maintain temperature at -10°F, for single door, double and triple door -8°F.

⌘ BOTTOM MOUNT COMPRESSOR
Allows easier access with service friendly rails while adding more storage space above. This system provides a cool and clean operating environment enhancing the compressor life.

⌘ ALL BASIC PAN SIZES ACCEPTED, including 18" x 26".

⌘ DUAL PANE GLASS DOORS
"G" model units come with dual pane glass doors with aluminium frames and LED interior lights for better operation and efficiency.

⌘ INCANDESCENT LIGHT & SWIVEL CASTERS
Solid door units come with interior incandescent and all units have 4"

OPTIONS & ACCESSORIES

Additional epoxy coated shelves / 2.5" Casters /
6" Adjustable stainless steel legs / Factory reverse door hinging /
220V-50 cycles- 1 phase

MODEL	DOORS	CAPACITY (Cu.Ft)	SHLVS.	AMPS	HP	VOLTAGE	NEMA PLUG	CORD LENGHT	CABINET DIMENSIONS L	D	H*	SHIPPING WT.	CUBES
REFRIGERATOR													
ARR-23	1	23	3	5.6	1/4	115	5-15P	8'	27-1/2"	31"	79-1/2"	301	51
ARR-49	2	49	6	6.9	1/3	115	5-15P	8'	55-1/2"	31"	79-1/2"	475	95
ARR-72	3	72	9	12.7	3/4	115	5-20P	8'	83-1/4"	31"	79-1/2"	665	155
ARR-23-1G	1	23	3	6.0	1/4	115	5-15P	8'	27-1/2"	31"	79-1/2"	315	51
ARR-49-2G	2	49	6	7.3	1/3	115	5-15P	8'	55-1/2"	31"	79-1/2"	515	95
ARR-72-3G	3	72	9	12.7	3/4	115	5-15P	8'	83-1/4"	31"	79-1/2"	705	155
FREEZER													
ARF-23	1	23	3	8.5	3/4	115	5-15P	8'	27-1/2"	31"	79-1/2"	325	51
ARF-49	2	49	6	12.9	1	115	5-15P	8'	55-1/2"	31"	79-1/2"	500	95
ARF-72	3	72	9	14.5	1	115	5-20P	8'	83-1/4"	31"	79-1/2"	685	155

*Height does not include 5" overall for casters

13105 NW 47th Avenue Miami FL 33054
T. 305-477-1680 I Toll free 877-693-3372 I Fax 1-786-594-3780

asber

PLAN VIEW

Reach-ins

REFRIGERATORS & FREEZERS

ARR-23 View



ARR-49 View



ARR-72 View

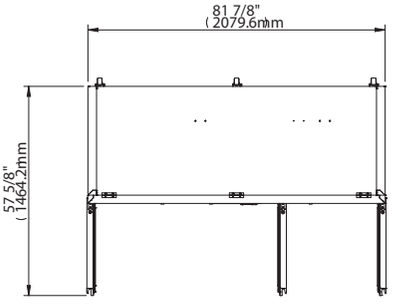

Top View

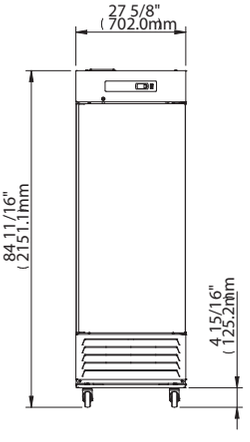

Top View

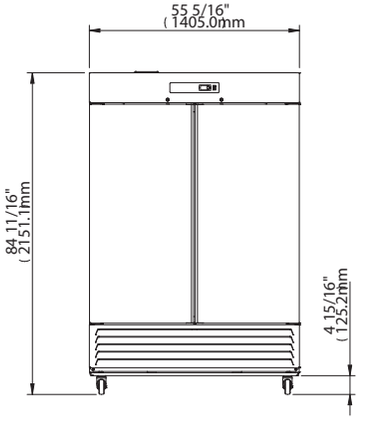

Top View

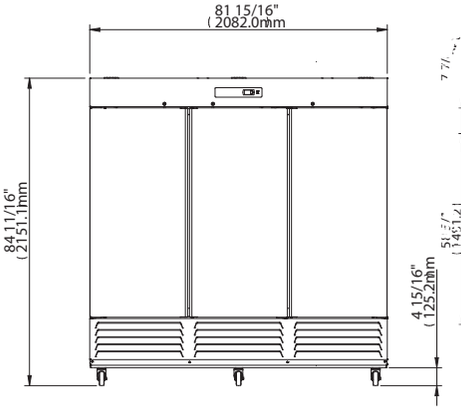

Common View

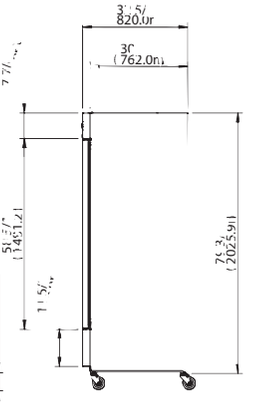

Specifications

ISO 9001

④ CABINET CONSTRUCTION

- EXTERIOR: Stainless steel, galvanized steel back.
- INTERIOR: Stainless steel.
- CABINET & DOOR : entire foamed-in-place high-density, CFC-free, polyurethane insulation. Coved corner floor to meet NSF requirements.
- CASTERS: 4" Diameter swivel casters, front with brakes.
- SHELVES: 3 Adjustable epoxy coated wire shelves per door.

④ DOORS

- Solid doors have stainless steel front and interior. "G" glass door models are dual pane with aluminium frame.
- Doors in step design gives added protection to the gasket.
- GASKETS: One piece construction magnetic gasket, removable without tools for easy cleaning.
- CLOSING SYSTEM: Self-closing doors with 90° stay open feature for convenient loading and unloading.

④ REFRIGERATION SYSTEM

- Oversized and balanced refrigeration system.
- R-134A holding temperature at 33°F to 38°F Refrigerators. R-404A for 3 door Refrigerator.
- R-404A holding temperature at -10°F Freezers for single doors and -8°F on double and triple doors.
- Self-contained capillary tube system using environtmentally friendly refrigerant Ecomate® (CFC free).
- Bottom mount compressor with service friendly rail system.
- Evaporator coil is mounted in the rear of the unit with full accessibility from the back.
- Large fan motor and fan blades for better air circulation.
- Self contained system, no plumbing nesessary.

④ ELECTRICAL

- The whole unit us completely pre-wired at factory with cord and plug set included and ready for final connection to a 115/60/1 phase.
- 220V/50 Hz/ 1 Ph available from factory.

④ WARRANTY

Continental USA & Canada:

- **One year** labor and parts warranty.
- **Five year** compressor warranty.
- **International:** one year parts only.

13105 NW 47th Avenue Miami FL 33054
T. 305-477-1680 I Toll free 877-693-3372 I Fax 1-786-594-3780

asber

HUMANITY AT WORK MONDRAGON

iTEM # .....

asber

Reach-ins | REFRIGERATORS & FREEZERS

- ☐ ARR-23
- ☐ ARF-23
- ☐ ARR-49
- ☐ ARF-49
- ☐ ARR-23 1G
- ☐ ARR-49 2G

STANDARD FEATURES

- **DURABLE STAINLESS STEEL**
  Our reach-ins boast a sturdy stainless steel exterior and interior finish and galvanized back panel providing strength and durability.
- **ERGONOMICALLY DESIGNED DOORS WITH LOCKS**
  Standard solid and glass doors come with easy grip handles and self closing/90 ° stay open door feature, working together for customer convenience.
- **MAGNETIC DOOR GASKET**
  Built of one piece, the gasket is removable without tools for ease of cleaning and replacement. Door's in step design gives added protection to the gasket.
- **DIGITAL CONTROLLER**
  This temperature control system on refrigerators and freezers allows customers to keep the utmost food quality for a longer period of time.
- **HIGH DENSITY POLYURETHANE INSULATION**
  2-3/8 inches CFC-free polyurethane insulation foamed in place for extra strength and energy efficiency, while being environmentally friendly with zero ozone depletion potential (ODP) and zero global warming potential (GWP).
- **EFFICIENT REFRIGERATION SYSTEM**
  Factory engineered oversized and balanced refrigeration system. CFC-free R-134A Refrigerators mantain temperature from 33° to 38°F and R-404A Freezers maintain temperature at -10°F, for single door, double door -8°F.
- **BOTTOM MOUNT COMPRESSOR**
  Allows easier access with service friendly rails while adding more storage space above. This system provides a cool and clean operating environment enhancing the compressor life.
- **ALL BASIC PAN SIZES ACCEPTED,** including 18" x 26".
- **DUAL PANE GLASS DOORS**
  "G" model units come with dual pane glass doors with aluminium frames and LED interior lights for better operation and efficiency.
- **INCANDESCENT LIGHT & SWIVEL CASTERS**
  Solid door units come with interior incandescent and all units have 4" diameter swivel casters, front two with brakers.

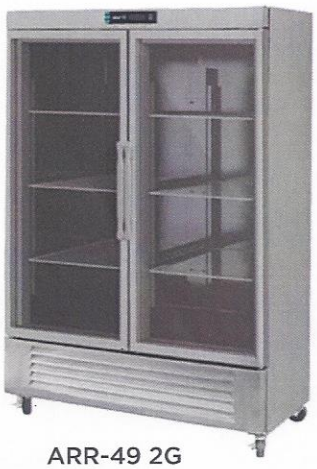

ARR-49 2G

ARR-23 1G

ARR-(F)23

ARR(F)-49

OPTIONS & ACCESSORIES

Additional epoxy coated shelves / 2.5" Casters /
6" Adjustable stainless steel legs / Factory reverse door hinging /
220V-50 cycles- 1 phase

MODEL	DOORS	CAPACITY (Cu.Ft)	SHLVS.	AMPS	HP	VOLTAGE	NEMA PLUG	CORD LENGHT	CABINET DIMENSIONS L	D *	H**	SHIPPING WT.	CUBES
REFRIGERATOR													
ARR-23	1	23	3	5.6	1/4	115/60/1	5-15P	8'	27-1/2"	31"	75-1/4"	295	51
ARR-49	2	49	6	6.9	1/3	115/60/1	5-15P	8'	55-1/2"	31"	75-1/4"	475	95
ARR-23 1G	1	23	3	6.0	1/4	115/60/1	5-15P	8'	27-1/2"	31"	75-1/4"	315	51
ARR-49 2G	2	49	6	7.3	1/3	115/60/1	5-15P	8'	55-1/2"	31"	75-1/4"	505	95
FREEZER													
ARF-23	1	23	3	8.5	3/4	115/60/1	5-15P	8'	27-1/2"	31"	75-1/4"	295	51
ARF-49	2	49	6	12.9	1	115/60/1	5-15P	8'	55-1/2"	31"	75-1/4"	475	95

*Depth does not include 1 5/8 per door handle ,**Height does not include 5" overall for casters

13105 NW 47th Avenue, Miami FL 33054
Tel. 305-477-1680 Fax. 786-594-3780
TollFree.1-(877)-693-3372

asber

www.asberusa.com

ISO 9001

asber

PLAN VIEW

Reach-ins

REFRIGERATORS & FREEZERS

ARR-49 Front

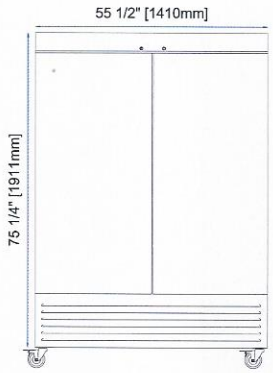

ARR-23 Front

ARR Common View

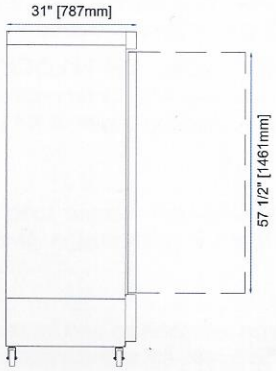

ARR-49 2G Front

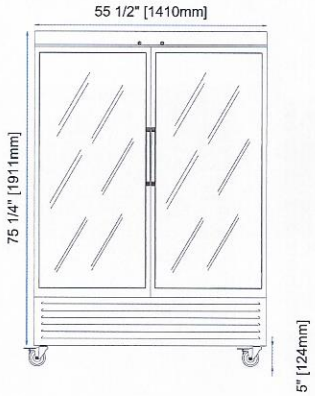

ARR-23 1G Front

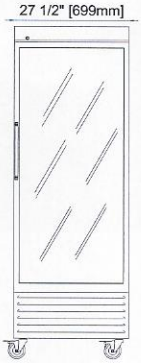

ARR-23 Top



ARR-49 Top



ISO 1400

ISO 9001

Specifications

CABINET CONSTRUCTION

- EXTERIOR: Stainless steel, galvanized steel back.
- INTERIOR: Stainless steel.
- CABINET & DOOR : entire foamed-in-place high-density, CFC-free, polyurethane insulation. Coved corner floor to meet NSF requirements.
- CASTERS: 4" Diameter swivel casters, front two with brakers.
- SHELVES: 3 Adjustable heavy duty epoxy coated wire shelves per door.

DOORS

- Solid doors have stainless steel front and interior. "G" glass door models are dual pane with aluminium frame.
- GASKETS: One piece construction magnetic gasket, removable without tools for easy cleaning.
- CLOSING SYSTEM: Self-closing doors with 90° stay open feature for convenient loading and unloading.

REFRIGERATION SYSTEM

- Oversized and balanced refrigeration system.
- R-134A holding temperature at 33°F to 38°F Refrigerators.
- R-404A holding temperature at -10°F Freezers for single doors and -8°F on double doors.
- Self-contained capillary tube system using environtmentally friendly refrigerant (CFC free).
- Bottom mount compressor with service friendly rail system.
- Evaporator coil is mounted in the rear of the unit with full accessibility from the back.
- Large fan motor and fan blades for better air circulation.
- Self contained system, no plumbing nesessary.

ELECTRICAL

- The whole unit us completely pre-wired at factory with cord and plug set included and ready for final connection to a 115/60/1 phase.
- 220V/50 Hz/ 1 Ph available from factory.

WARRANTY

Continental USA & Canada:

- **One year** labor and parts warranty.
- **Five year** compressor warranty.
- **International:** one year parts only.

13105 NW 47th Avenue, Miami FL 33054
Tel. 305-477-1680 Fax. 786-594-3780
TollFree.1-(877)-693-3372

asber

www.asberusa.com